

油墨循環泵浦設備 UT-IPD Ink Circulating Pump And Device



www.utech-tw.com



UT-PMM

UT-IPD

簡介 Introduction

油墨循環泵浦設備為印刷機、貼合機專用設備，適合處理有溶劑性、磨耗性、高黏度之流體，可無限制的持續空轉卻不會造成損壞。氣動式雙隔膜泵浦為高級鋁合金製做，配合穩壓器，油墨流動更為順暢，泵浦內元件皆為耐溶劑材質，為經濟又安全的油墨循環設備。

For the circulation of printing machine and coating machine, very suitable for handling the solvent, wearing and high viscosity fluid, can do continuous idle running with no restriction, but causing no damage.

規格 Specifications

流體出入口口徑	Material Inlet / Outlet	3/8"PT
氣壓入口口徑	Air Inlet	1/4"PT
氣壓出口口徑	Air Outlet	1/4"PT
常用工作壓力	Operating pressure:	1.5-5Bar (kgf/cm ²)
流體最容許顆粒	Suspended solids max. Dia.	Under \varnothing 1.5mm 以下
入口揚程	Maximum suction lift	6M-濕(wet), 3.7m-乾(dry)
最大流量	Maximum flow	30 Liter / Per Min

油墨循環泵浦設備


UT-IPD

Ink Circulating Pump And Device



www.utech-tw.com

使用示意圖 Flow Chart

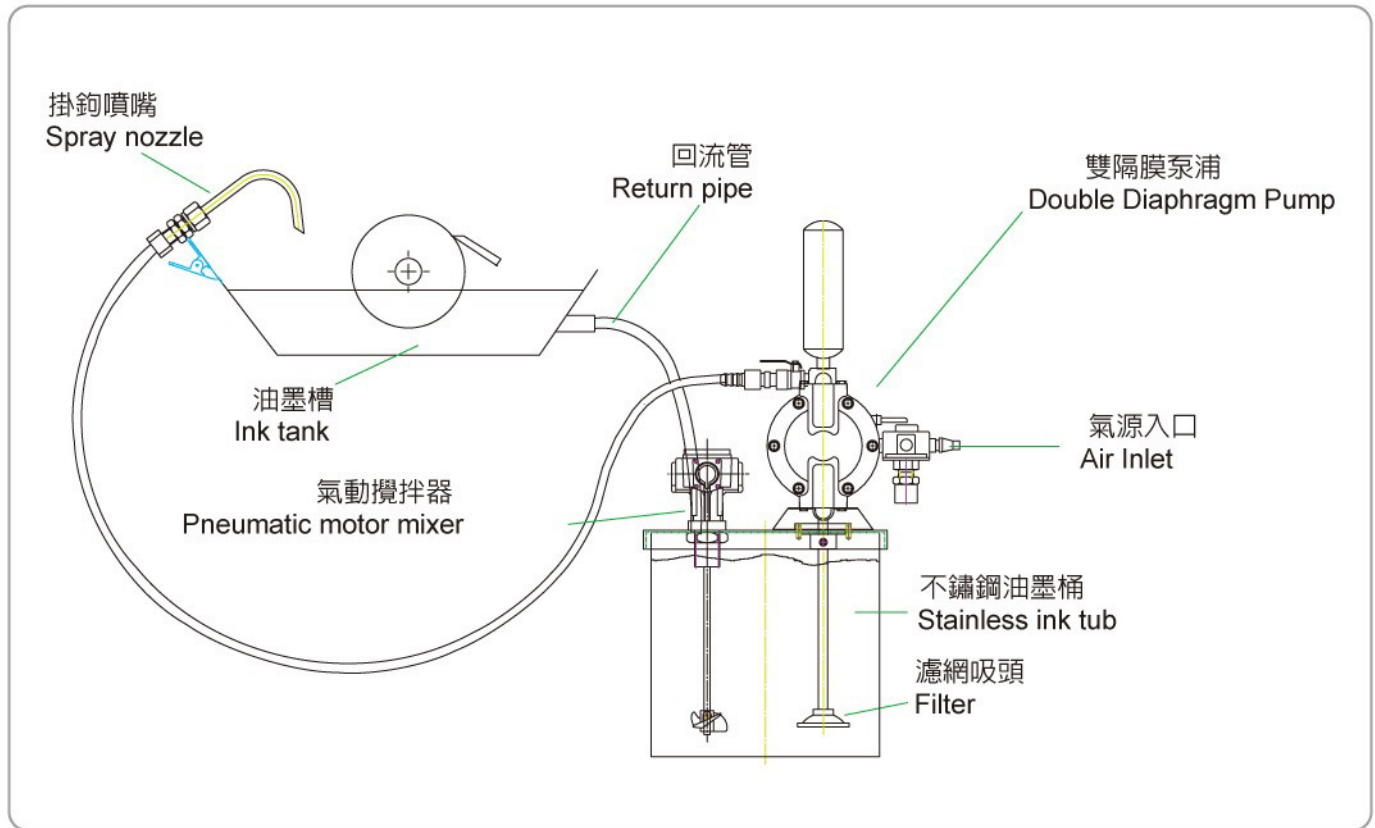

選購配件

1. 30公升不鏽鋼油墨桶(含蓋)
2. 1/8 HP 氣動式馬達攪拌器
3. 耐溶劑橡膠管
4. 濾網吸頭
5. 掛鈎噴嘴

Optional Device

1. 30L stainless ink tub with cover.
2. 1/8 HP Pneumatic motor mixer.
3. Solvent - resist ink tube.
4. Filter
5. spray nozzle

